Fig.1

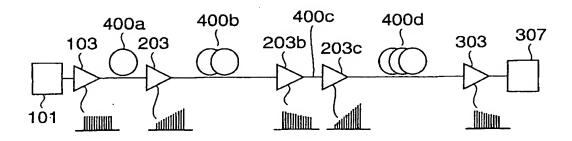


Fig.2A

B R L1 L2 WAVELENGTH

(a) SPECTRUM AT FIBER INPUT

Fig.2B



(b) SPECTRUM AT FIBER OUTPUT


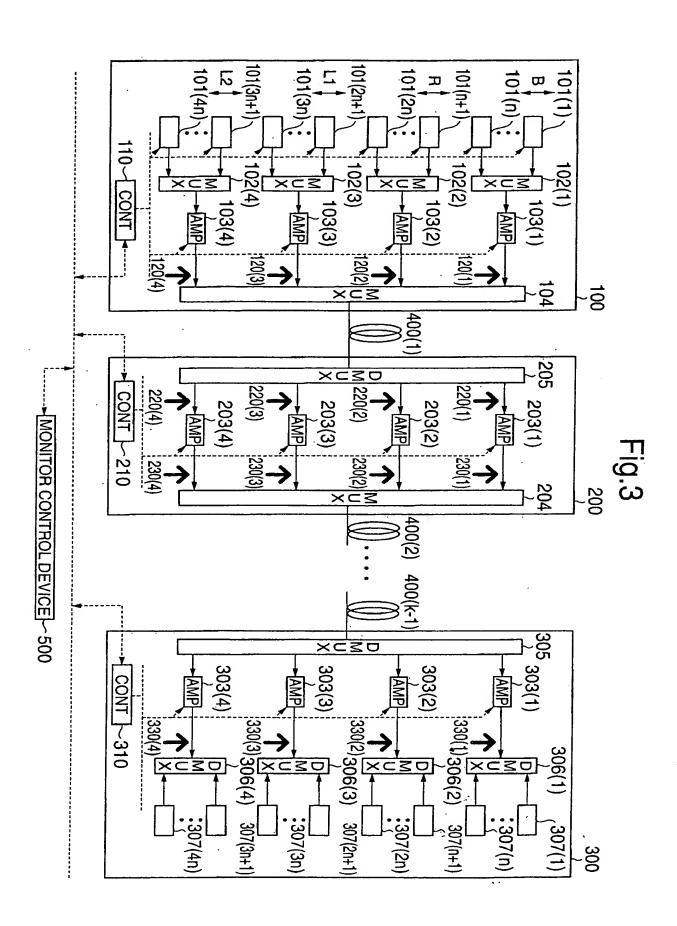


Fig.4

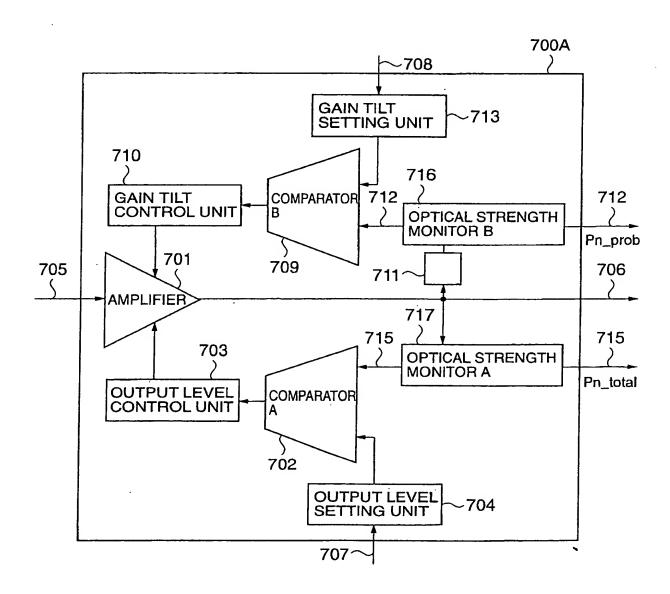

1ST ENBEDIENT
PATENTABLE FEATURES TWO MONITORS - ALMOST REAL TIME FEED BACK
S/N REMAINS

Fig.5

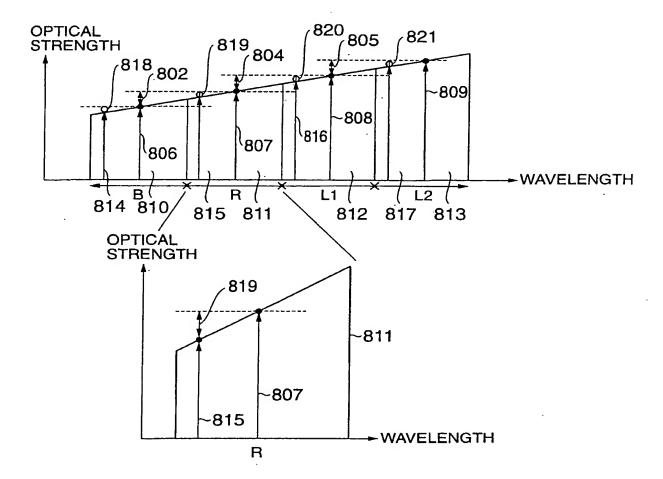


Fig.6

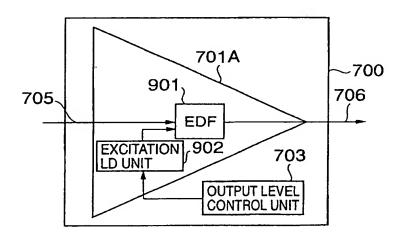


Fig.7

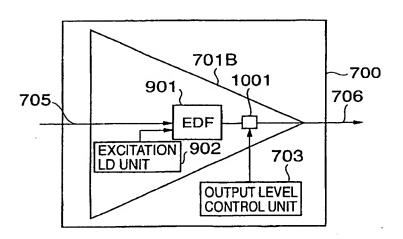
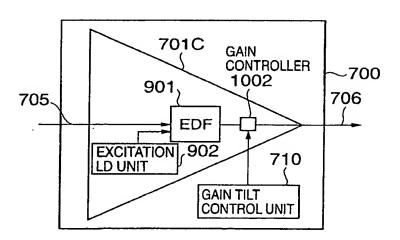


Fig.8





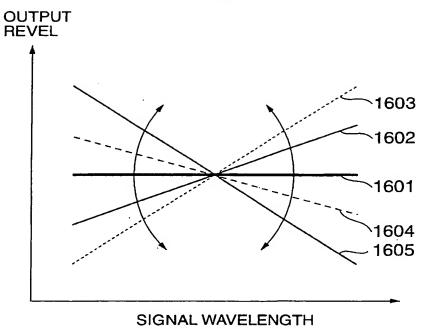


Fig.10

PRE AMPLIFIER 103 AFTER OUTPUT SPECTRUM	FIBER 400(1) AFTER TRANSMISSION SPECTRUM	LINE AMPLIFIER 203 AFTER OUTPUT SPECTRUM	POST AMPLIFIER 303 AFTER OUTPUT SPECTRUM
120(1)	220(1)	230(1)	330(1)
120(2)	220(2)	230(2)	330(2)
120(3)	220(3)	230(3)	330(3)
120(4)	220(4)	230(4)	330(4)

Fig.11

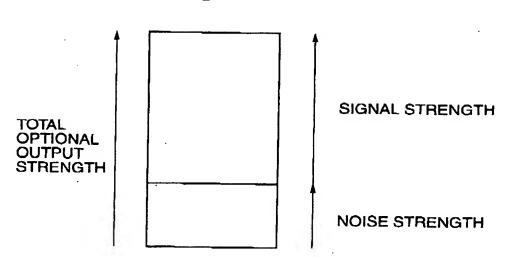
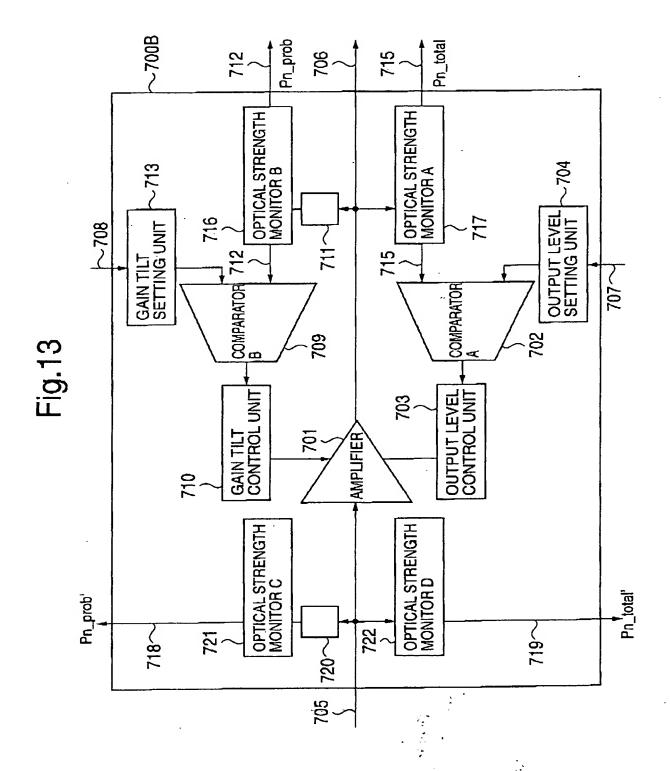


Fig.12

	·		
PRE AMPLIFIER 103 AFTER OUTPUT SPECTRUM	FIBER 400(1) AFTER TRANSMISSION SPECTRUM	LINE AMPLIFIER 203 AFTER OUTPUT SPECTRUM	POST AMPLIFIER 303 AFTER OUTPUT SPECTRUM
120(1)	220(1)	230(1)	330(1)
120(2)	220(2)	230(2)	330(2)
120(3)	220(3)	230(3)	330(3)
	. ==		
120(4)	220(4)	230(4)	330(4)
			



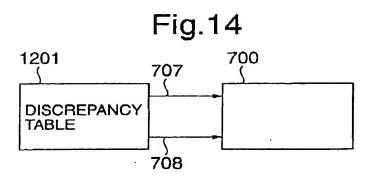


Fig.15 1403 700C 400 400 1404 701 723 704 713~ · 🗖 🗖 -712 -715 713 ⁷⁰⁴ 708 -1401 718 7Ó7 1402 719

Fig.16A

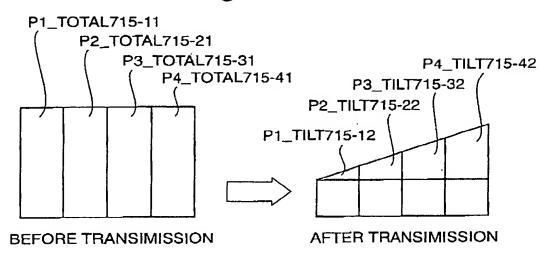


Fig.16B

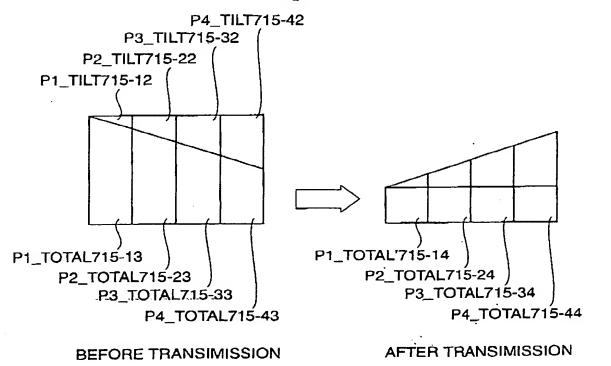


Fig.17

PRE AMPLIFIER 103 AFTER OUTPUT SPECTRUM	FIBER 400(1) AFTER TRANSMISSION SPECTRUM	LINE AMPLIFIER 203 AFTER OUTPUT SPECTRUM	POST AMPLIFIER 303 AFTER OUTPUT SPECTRUM
120(1)	220(1)	230(1)	330(1)
120(2)	220(2)	230(2)	330(2)
120(3)	220(3)	230(3)	330(3)
120(4)	220(4)	230(4)	330(4)

